

## CONTOUR PENDANT CEILING MOUNTING PLATE

### FINISH

antique bronze with clear kiln glass  
antique bronze with bronze kiln glass

### DIMENSIONS (body of fixture)

1800 x 165 x 200 mm (l x w x h)

### WEIGHT

30kg (66.1lbs)

please ensure ceiling structure is strong enough to support the weight of the light

### OVERALL DROP

minimum 358 mm

maximum on request 8208 mm

supplied with 2 x 1000mm drop rod (12.7 mm dia) as standard (adjustable on site)

### ILLUMINATION

220-240v - integrated LED - 58w - 2700k

110-130v - integrated LED - 58w - 2700k

LED driver to be installed in the ceiling cavity and remote

drivers must be installed up to 20 meters from the body of the light

### DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard DALI option available (220-240v only)

0/1-10v (220-240v) - on request


### CEILING ROSE / PLATE

ceiling plate - 116mm x 116mm x 8mm

### CERTIFICATION



### VIEW ON WEBSITE

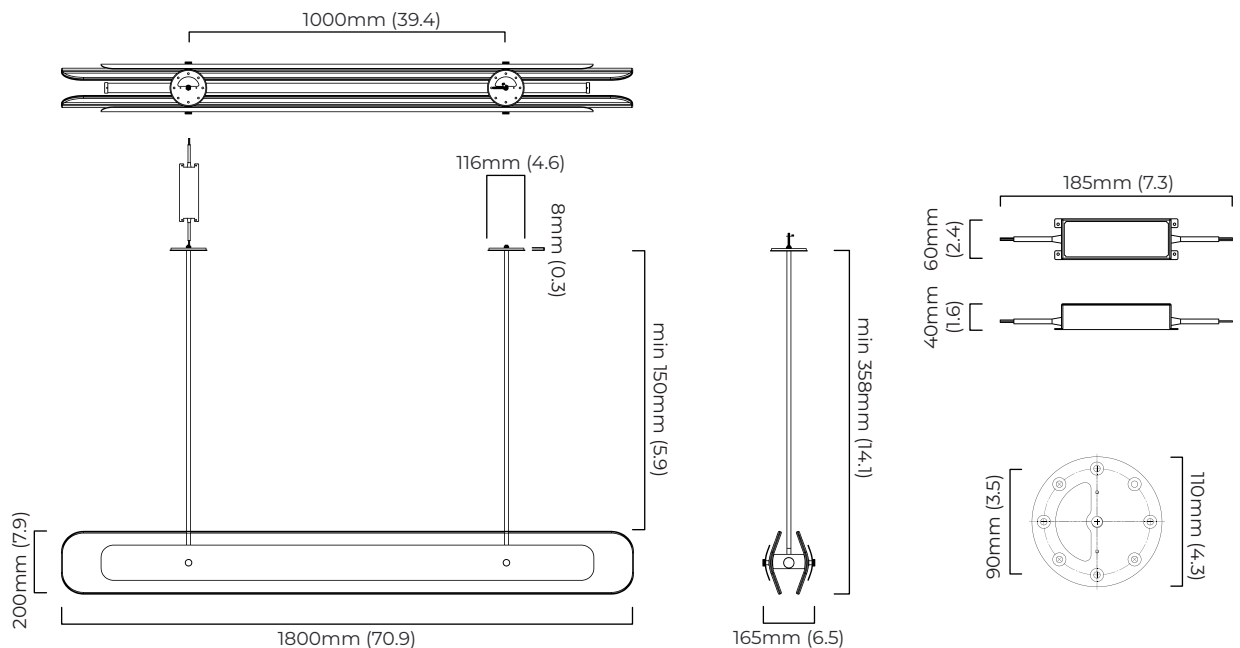

\*Diagrams are not to scale.

## CONTOUR PENDANT CEILING ROSE

### FINISH

antique bronze with clear kiln glass  
antique bronze with bronze kiln glass

### DIMENSIONS (body of fixture)

1800 x 165 x 200 mm (l x w x h)

### WEIGHT

30kg (66.1lbs)

please ensure ceiling structure is strong enough to support the weight of the light

### OVERALL DROP

minimum 405 mm

maximum on request 8240 mm

supplied with 2 x 1000mm drop rod (12.7 mm dia) as standard (adjustable on site)

### ILLUMINATION

220-240v - integrated LED - 58w - 2700k

110-130v - integrated LED - 58w - 2700k

LED driver to be installed in the ceiling rose

### DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard DALI option available (220-240v only)

0/1-10v (220-240v) - on request



### CEILING ROSE / PLATE

ceiling rose - 195mm x 195mm x 55mm

### CERTIFICATION



### VIEW ON WEBSITE

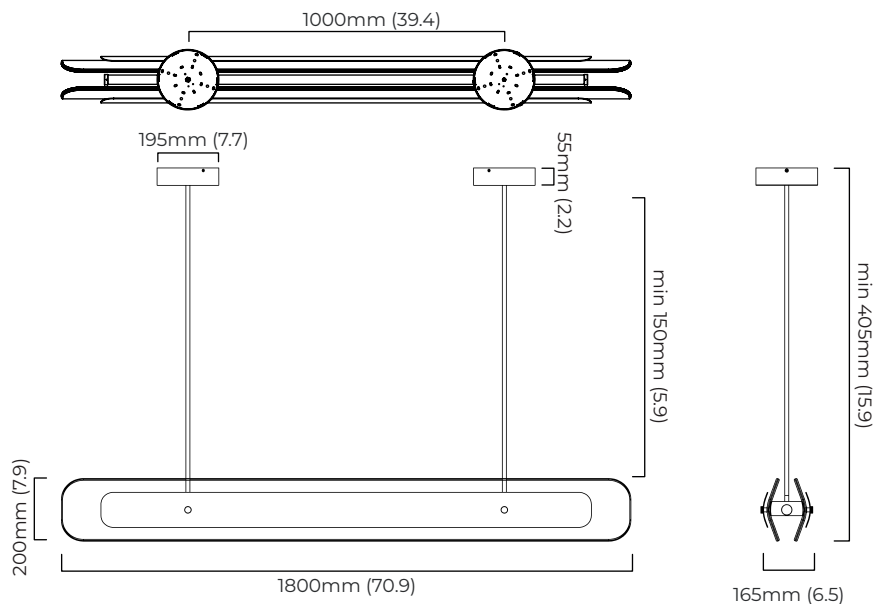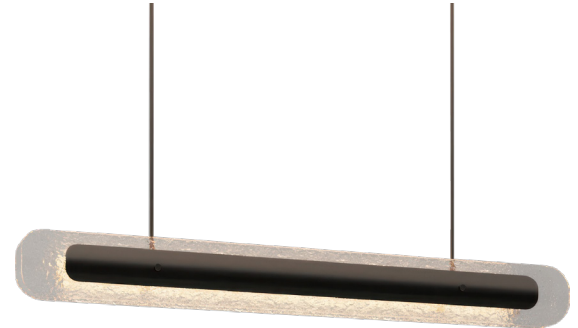

\*Diagrams are not to scale.

## CONTOUR PENDANT CEILING MOUNTING PLATE - DALI A

### FINISH

antique bronze with clear kiln glass  
antique bronze with bronze kiln glass

### DIMENSIONS (body of fixture)

1800 x 165 x 200 mm (l x w x h)

### WEIGHT

30kg (66.1lbs)

please ensure ceiling structure is strong enough to support the weight of the light

### OVERALL DROP

minimum 358 mm

maximum on request 8208 mm

supplied with 2 x 1000mm drop rod (12.7 mm dia) as standard (adjustable on site)

### ILLUMINATION

220-240v - integrated LED - 58w - 2700k

DALI LED driver to be installed in the ceiling cavity or remote

drivers must be installed up to 20 meters from the body of the light

### DIMMING

DALI Compatible



### CEILING ROSE / PLATE

ceiling plate - 116mm x 116mm x 8mm

### CERTIFICATION



### VIEW ON WEBSITE

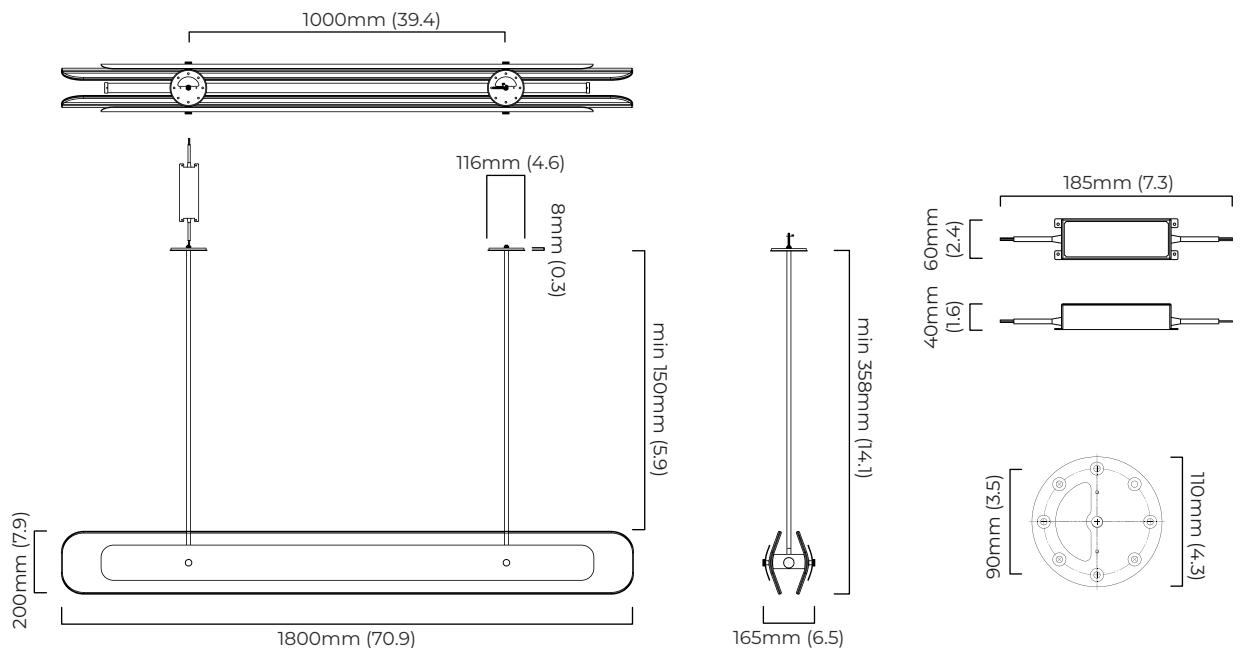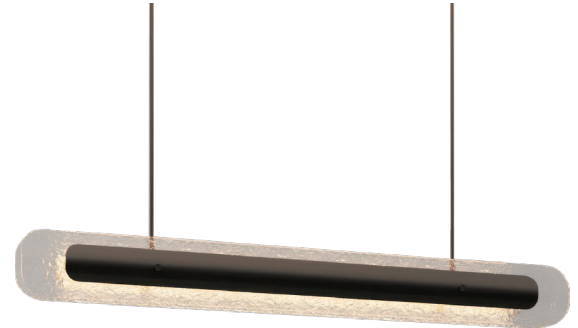

\*Diagrams are not to scale.

## CONTOUR PENDANT CEILING ROSE - DALI A

### FINISH

antique bronze with clear kiln glass  
antique bronze with bronze kiln glass

### DIMENSIONS (body of fixture)

1800 x 165 x 200 mm (l x w x h)

### WEIGHT

30kg (66.1lbs)

please ensure ceiling structure is strong enough to support the weight of the light

### OVERALL DROP

minimum 405 mm

maximum on request 8240 mm

supplied with 2 x 1000mm drop rod (12.7 mm dia) as standard (adjustable on site)

### ILLUMINATION

220-240v - integrated LED - 58w - 2700k

DALI LED driver to be installed in the ceiling rose

### DIMMING

DALI Compatible



### CEILING ROSE / PLATE

ceiling rose - 195mm x 195mm x 55mm

### CERTIFICATION



### VIEW ON WEBSITE

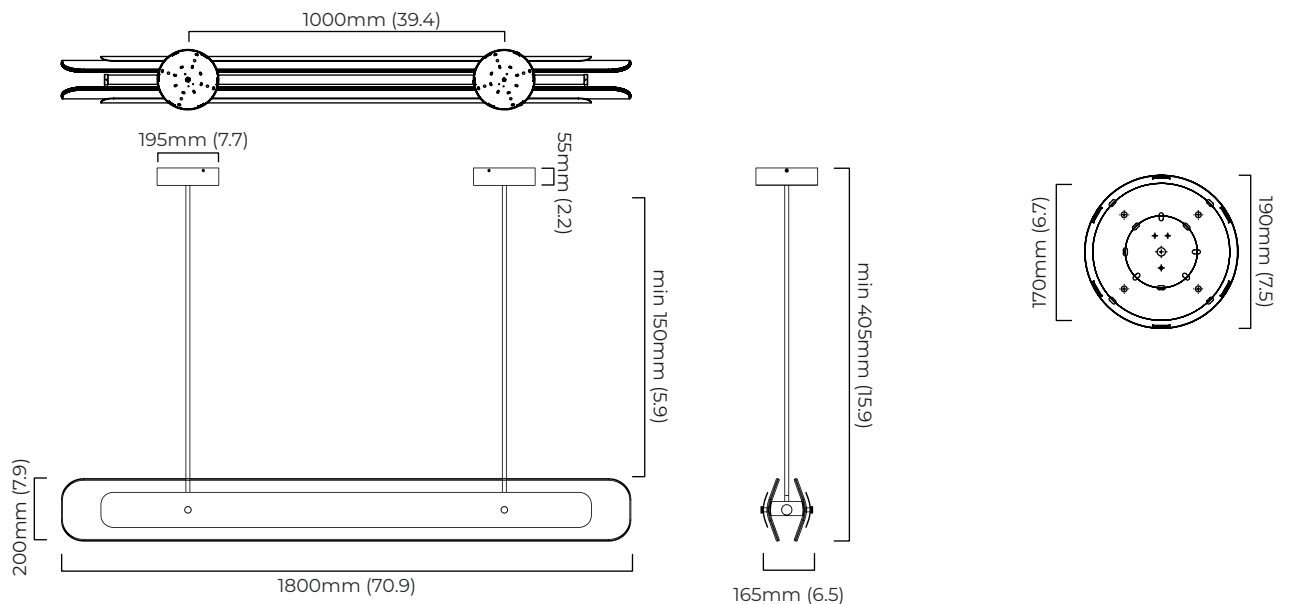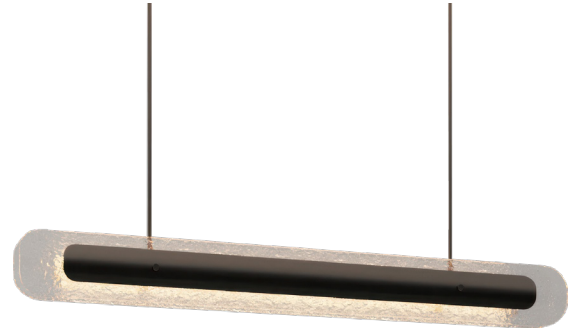

\*Diagrams are not to scale.

## CONTOUR PENDANT

| SKU NUMBER              | FINISH DESCRIPTION                    | VOLTAGE    |
|-------------------------|---------------------------------------|------------|
| CONPEHABCK-CM-240       | antique bronze with clear kiln glass  | 220 - 240V |
| CONPEHABBK-CM-240       | antique bronze with bronze kiln glass | 220 - 240V |
| CONPEHABCK-CM-DALIA-240 | antique bronze with clear kiln glass  | 220 - 240V |
| CONPEHABBK-CM-DALIA-240 | antique bronze with bronze kiln glass | 220 - 240V |
| CONPEHABCK-CM-110       | antique bronze with clear kiln glass  | 110 - 130V |
| CONPEHABBK-CM-110       | antique bronze with bronze kiln glass | 110 - 130V |
| CONPEHABCK-CR-240       | antique bronze with clear kiln glass  | 220 - 240V |
| CONPEHABBK-CR-240       | antique bronze with bronze kiln glass | 220 - 240V |
| CONPEHABCK-CR-DALIA-240 | antique bronze with clear kiln glass  | 220 - 240V |
| CONPEHABBK-CR-DALIA-240 | antique bronze with bronze kiln glass | 220 - 240V |
| CONPEHABCK-CR-110       | antique bronze with clear kiln glass  | 110 - 130V |
| CONPEHABBK-CR-110       | antique bronze with bronze kiln glass | 110 - 130V |