

TRACE CIRCULAR HALO CEILING MOUNTING PLATE

FINISH

antique bronze with liquid cast glass
bronze with liquid cast glass

DIMENSIONS (body of fixture)

1305 x 1305 x 530 mm (l x w x h)

WEIGHT

35kg (77.2lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 638 mm

maximum on request 8538 mm

all suspension cables are supplied to correct length

ILLUMINATION

220-240v - integrated LED - 84w - 2700k

110-130v - integrated LED - 84w - 2700k

LED driver to be installed in the ceiling cavity and remote drivers must be installed up to 20 meters from the body of the light

DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard DALI option available (220-240v only)

0/1-10v (220-240v) - on request




CEILING ROSE / PLATE

ceiling plate - 116mm x 116mm x 8mm

CERTIFICATION



VIEW ON WEBSITE

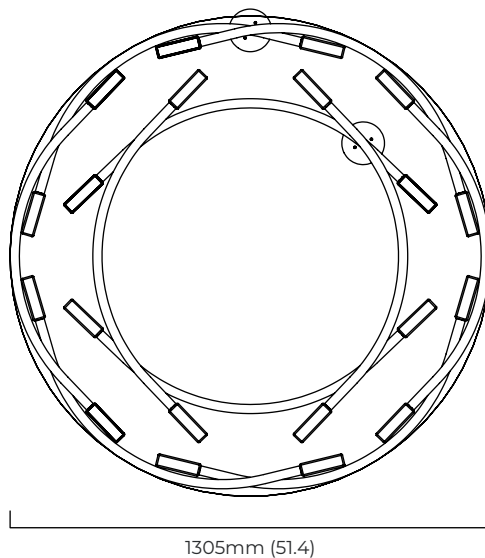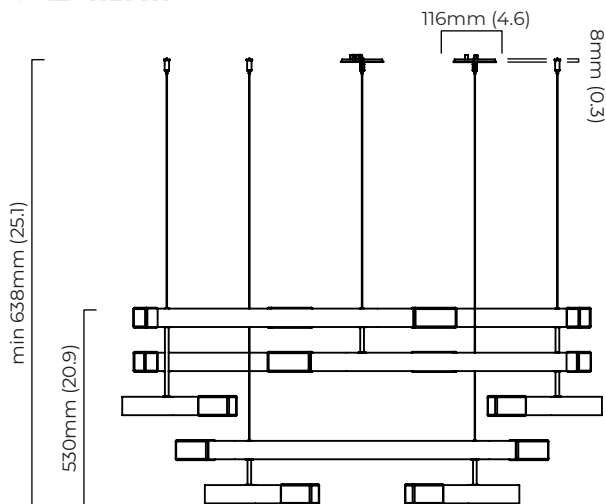

*Diagrams are not to scale.

TRACE CIRCULAR HALO CEILING ROSE

FINISH

antique bronze with liquid cast glass
bronze with liquid cast glass

DIMENSIONS (body of fixture)

1305 x 1305 x 530 mm (l x w x h)

WEIGHT

43kg (94.8lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 670 mm

maximum on request 8570 mm

all suspension cables are supplied to correct length

ILLUMINATION

220-240v - integrated LED - 84w - 2700k

110-130v - integrated LED - 84w - 2700k

LED driver to be installed in the ceiling rose

DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard DALI option available (220-240v only)

0/1-10v (220-240v) - on request




CEILING ROSE / PLATE

ceiling rose - 195mm x 195mm x 40mm

CERTIFICATION



[VIEW ON WEBSITE](#)

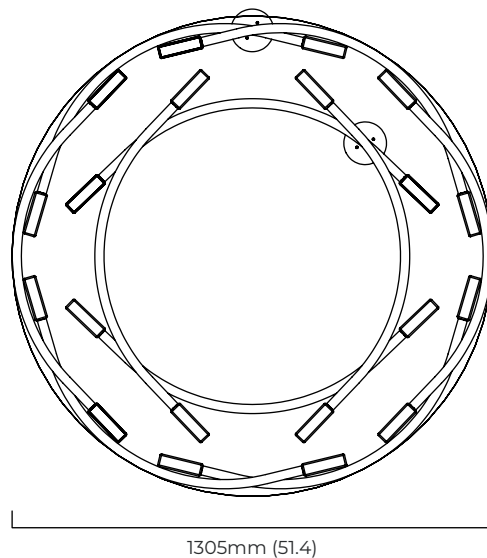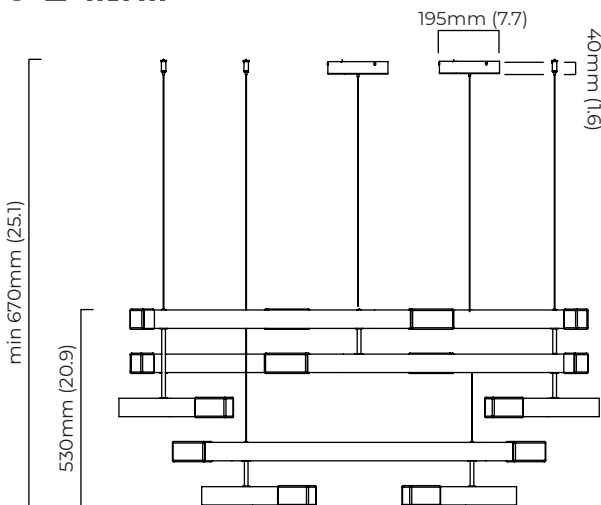

*Diagrams are not to scale.

TRACE CIRCULAR HALO CEILING MOUNTING PLATE - DALI A

FINISH

antique bronze with liquid cast glass
bronze with liquid cast glass

DIMENSIONS (body of fixture)

1305 x 1305 x 530 mm (l x w x h)

WEIGHT

35kg (77.2lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 638 mm

maximum on request 8538 mm

all suspension cables are supplied to correct length

ILLUMINATION

220-240v - integrated LED - 84w - 2700k

DALI LED driver to be installed in the ceiling cavity and remote drivers must be installed up to 20 meters from the body of the light

DIMMING

DALI compatible




CEILING ROSE / PLATE

ceiling plate - 116mm x 116mm x 8mm

CERTIFICATION



VIEW ON WEBSITE

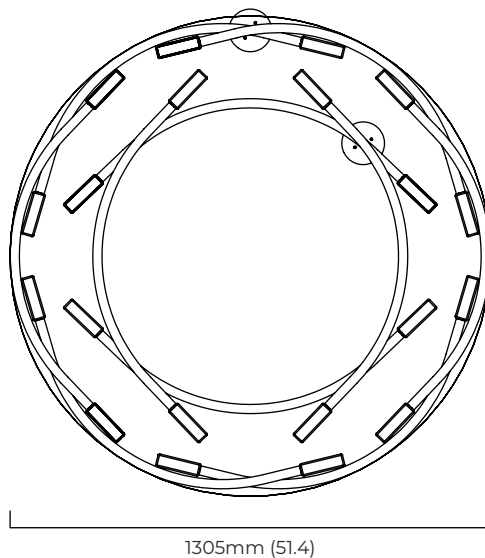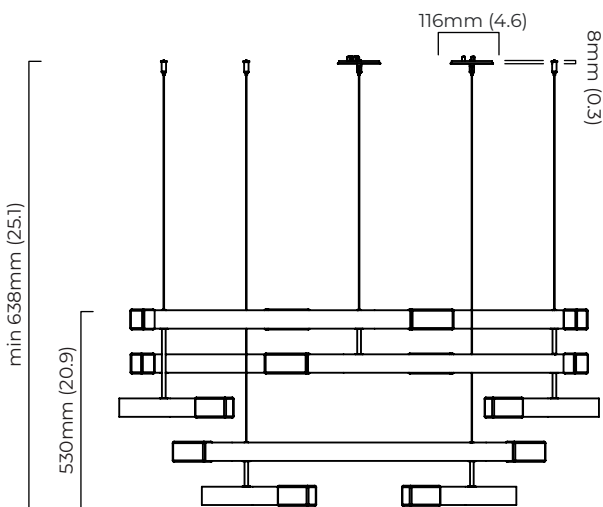

*Diagrams are not to scale.

TRACE CIRCULAR HALO CEILING ROSE - DALI A

FINISH

antique bronze with liquid cast glass
bronze with liquid cast glass

DIMENSIONS (body of fixture)

1305 x 1305 x 530 mm (l x w x h)

WEIGHT

43kg (94.8lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 670 mm

maximum on request 8570 mm

all suspension cables are supplied to correct length

ILLUMINATION

220-240v - integrated LED - 84w - 2700k

DALI LED driver to be installed in the ceiling rose

DIMMING

DALI compatible




CEILING ROSE / PLATE

ceiling rose - 195mm x 195mm x 40mm

CERTIFICATION



[VIEW ON WEBSITE](#)

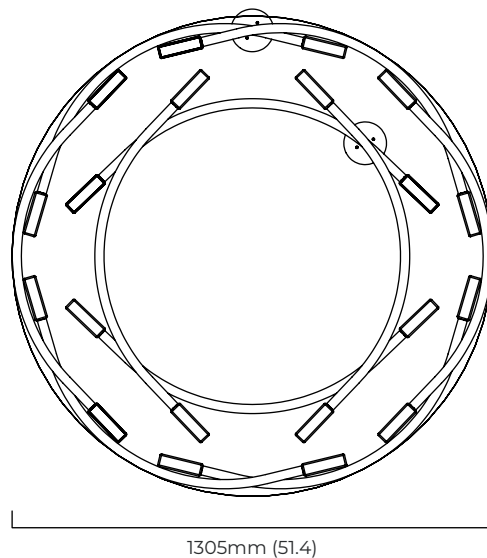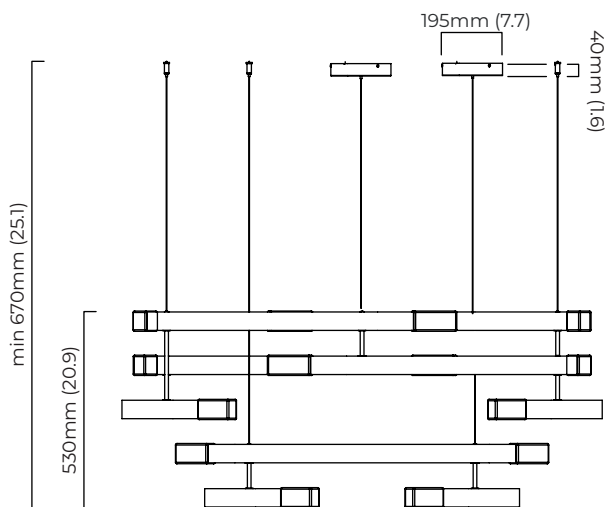

*Diagrams are not to scale.

TRACE CIRCULAR HALO

CEILING MOUNTED

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
TRAPEHABLG-CM-240	antique bronze with liquid cast glass	220 - 240V
TRAPEHABLG-CM-DALIA-240	antique bronze with liquid cast glass - DALI A	220 - 240V
TRAPEHABLG-CM-110	antique bronze with liquid cast glass	110 - 130V
TRAPEHBZLG-CM-240	bronze with liquid cast glass	220 - 240V
TRAPEHBZLG-CM-DALIA-240	bronze with liquid cast glass - DALI A	220 - 240V
TRAPEHBZLG-CM-110	bronze with liquid cast glass	110 - 130V

CEILING ROSE

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
TRAPEHABLG-CR-240	antique bronze with liquid cast glass	220 - 240V
TRAPEHABLG-CR-DALIA-240	antique bronze with liquid cast glass - DALI A	220 - 240V
TRAPEHABLG-CR-110	antique bronze with liquid cast glass	110 - 130V
TRAPEHBZLG-CR-240	bronze with liquid cast glass	220 - 240V
TRAPEHBZLG-CR-DALIA-240	bronze with liquid cast glass - DALI A	220 - 240V
TRAPEHBZLG-CR-110	bronze with liquid cast glass	110 - 130V