


Code	4529	
Description	Outdoor adjustable accent spotlight with anodized aluminum frame (reinforced outdoor finish), AISI 316L stainless steel bracket and neoprene cable	
Year of production	2024	
Typology	wall ceiling earth	
Material	aluminum/INOX AISI 316L	
Light emission	direct	
IP grade	66	
Finishes	.34	Corten painted
	.39	Anthracite painted
	.45	Anodized aluminum
Allimentation	500mA - 2,9Vdc	
Technical Data	/W 1.5W (180 lm source) - 4000K - CRI>90	
	/WW 1.5W (162 lm source) - 3000K - CRI>90	
	/XW 1.5W (153 lm source) - 2700K - CRI>90	
Optical grade	11°	
	25°	
	45°	
Net weight	0,44 lb	
	59,06 inch	



ACCESSORIES

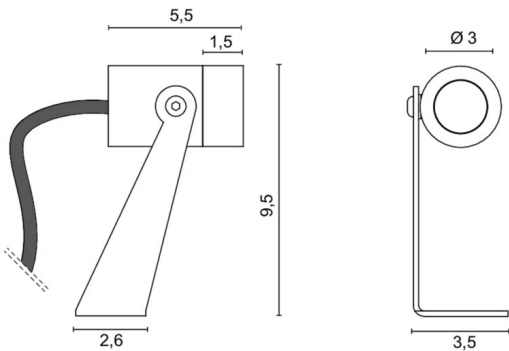

0247

0,18 lb



0127

0,14 lb



0129/DALI

0,30 lb

.DALI  DALI



Multi-power dimmable driver PUSH - 1...10V, 2-11 Spot
350mA 500mA

0141/DIM

0,00 lb

.DIM  DIM

ACCESSORIES



0141/DALI 0,22 lb
.DALI ➤ DALI



0145 0,47 lb



Multi-power DALI dimmable driver, 1-21 Spot
mA 350 500

0145/DALI 0,47 lb
.DIM (Dim) 1-10V-PUSH
.1-10V (1-10V) 1-10V
.DALI ➤ DALI