




Code	4530	
Typology	wall ceiling earth	
Material	aluminum/inox	
Light emission	live	
IP grade	66	
Finishes	.34	Corten painted
	.39	Anthracite painted
	.45	Anodized aluminum
Allimentation	350mA	
Technical Data	/W 5.9W (885 lm source) - 4000K - CRI>90	
	/WW 5.9W (836 lm source) - 3000K - CRI>90	
	/XW 5.9W (800 lm source) - 2700K - CRI>90	
Optical grade	18°	
	40°	
	60°	
Net weight	0,88 lb	




ACCESSORIES

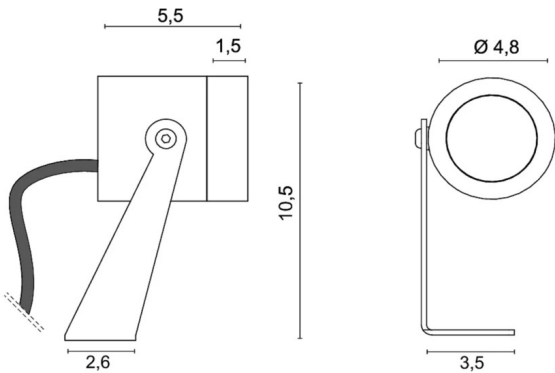

0247

0,18 lb



mA350

0128

0,14 lb



0129/DALI

0,30 lb

.DALI  DALI



0141/DIM

0,00 lb

.DIM  DIM

ACCESSORIES

Multi-power DALI dimmable driver, 1-2 Spot

0141/DALI
.DALI  DALI

0,22 lb



0145

0,47 lb



0145/DALI
.DIM  1-10V-PUSH
.1-10V  1-10V
.DALI  DALI

0,47 lb

