




Code	4537
Description	IP67 adjustable light bar for wall and ceiling applications, with diffused light made of transparent coextruded anti-UV methacrylate, AISI 316L stainless steel terminals and neoprene cable.
Year of production	2013
Typology	wall plafone
Material	methacrylate/INOX AISI 316L
Light emission	widespread
IP grade	67
Finishes	.33  Brushed steel
Allimentation	24Vdc
Technical Data	/W 16.5W (2024 lm source) - 4000K - CRI>90 /WW 16.5W (1815 lm source) - 3000K - CRI>90 /XW 16.5W (1716 lm source) - 2700K - CRI>90
Net weight	2,20 lb
	39,37 inch



ACCESSORIES

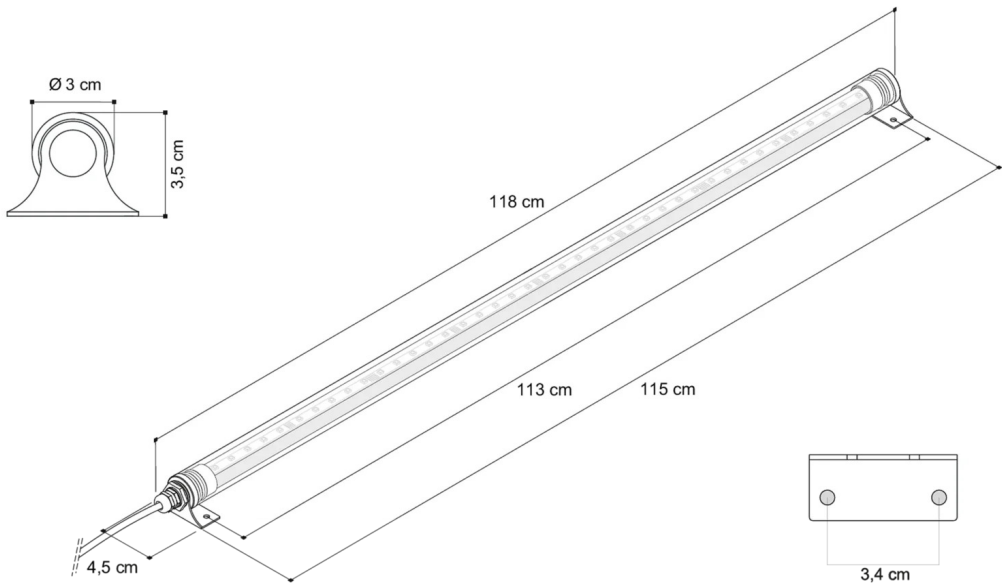

24V

U0160/24

0,00 lb



U0161/24

0,00 lb

Custom size

Table lengths available upon request. Measurements refer to complete fixtures including end caps.

inches	watt	2700K (XW)	lm	3000K (WW)	lm	4000K (W)	lm
7,09"	1.5 W	A4536.33/18/XW	156	A4536.33/18/WW	165	A4536.33/18/W	184
11,02"	3 W	A4536.33/28/XW	312	A4536.33/28/WW	330	A4536.33/28/W	368
14,96"	4.5 W	A4536.33/38/XW	468	A4536.33/38/WW	495	A4536.33/38/W	552
18,90"	6 W	A4536.33/48/XW	624	A4536.33/48/WW	660	A4536.33/48/W	736
22,83"	7.5 W	4536.33/XW	780	4536.33/WW	825	4536.33/W	920
26,77"	9 W	A4536.33/68/XW	936	A4536.33/68/WW	990	A4536.33/68/W	1104
30,71"	10.5 W	A4536.33/78/XW	1092	A4536.33/78/WW	1155	A4536.33/78/W	1288
34,65"	12 W	A4536.33/88/XW	1248	A4536.33/88/WW	1320	A4536.33/88/W	1472
38,58"	13.5 W	A4536.33/98/XW	1404	A4536.33/98/WW	1485	A4536.33/98/W	1656
42,52"	15 W	A4536.33/108/XW	1560	A4536.33/108/WW	1650	A4536.33/108/W	1840
46,46"	16.5 W	4537.33/XW	1716	4537.33/WW	1815	4537.33/W	2024
50,39"	18 W	A4536.33/128/XW	1872	A4536.33/128/WW	1980	A4536.33/128/W	2208
54,33"	19.5 W	A4536.33/138/XW	2028	A4536.33/138/WW	2145	A4536.33/138/W	2392
58,27"	21 W	A4536.33/148/XW	2184	A4536.33/148/WW	2310	A4536.33/148/W	2576
62,20"	22.5 W	A4536.33/158/XW	2340	A4536.33/158/WW	2475	A4536.33/158/W	2760
66,14"	24 W	A4536.33/168/XW	2496	A4536.33/168/WW	2640	A4536.33/168/W	2944
70,08"	25.5 W	A4536.33/178/XW	2652	A4536.33/178/WW	2805	A4536.33/178/W	3128
74,02"	27 W	A4536.33/188/XW	2808	A4536.33/188/WW	2970	A4536.33/188/W	3312
77,95"	28.5 W	A4536.33/198/XW	2964	A4536.33/198/WW	3135	A4536.33/198/W	3496
81,89"	30 W	A4536.33/208/XW	3120	A4536.33/208/WW	3300	A4536.33/208/W	3680
85,83"	31.5 W	A4536.33/218/XW	3276	A4536.33/218/WW	3465	A4536.33/218/W	3864
89,76"	33 W	A4536.33/228/XW	3432	A4536.33/228/WW	3630		
93,70"	34.5 W	A4536.33/238/XW	3588	A4536.33/238/WW	3795	A4536.33/238/W	4232
97,64"	36 W	A4536.33/248/XW	3744	A4536.33/248/WW	3960	A4536.33/248/W	4416

inches	watt	2700K (XW)	lm	3000K (WW)	lm	4000K (W)	lm
101,57"	37.5 W	A4536.33/258/XW	3900	A4536.33/258/WW	4125	A4536.33/258/W	4600