



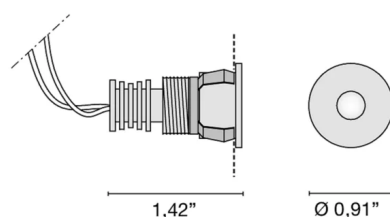

Code	6320
Description	Recessed micro spotlight (IP40) direct light with round aluminum body.
Year of production	2007
Typology	recessed ceiling wall
Material	aluminium
Light emission	direct
IP grade	40
Finishes	.01 White .32 Satin nickel
Allimentation	350mA - 2,9Vdc
Technical Data	/W 1W (151 lm source) - 4000K - CRI>90 /WW 1W (143 lm source) - 3000K - CRI>90 /XW 1W (138 lm source) - 2700K - CRI>90
Net weight	0,04 lb
	7,87 inch
	0,79 inch

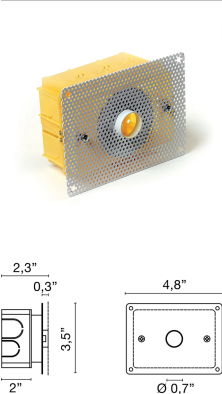

ACCESSORIES

 Technical drawing of the Plastic Plastic Box showing dimensions: length 2,7", diameter Ø 1,1", and hole diameter Ø 0,9".	Plastic Plastic Box mA 350 500	0215	0,03 lb
 Technical drawing of the Box + Perforated Plaster showing dimensions: top view 2,3" x 0,3", side view 2" x 3,5", and front view 4,8" x Ø 0,7".	Box + Perforated Plaster mA 350 500	0212	0,22 lb
 Technical drawing of the Multi-power dimmable driver PUSH showing dimensions: length 4,5", width 1,3", and height 0,8".	Multi-power dimmable driver PUSH - 1...10V, 2-11 Spot mA 350 500	0128	0,14 lb
	Multi-power dimmable driver DIM - 1...10V, 2-11 Spot mA 350 500	0141/DIM .DIM  DIM	0,00 lb

ACCESSORIES



0141/DALI 0,22 lb
.DALI  DALI



0145 0,47 lb



Multi-power DALI dimmable driver, 1-21 Spot
mA 350 500

0145/DALI 0,47 lb
.DIM  1-10V-PUSH
.1-10V  1-10V
.DALI  DALI