
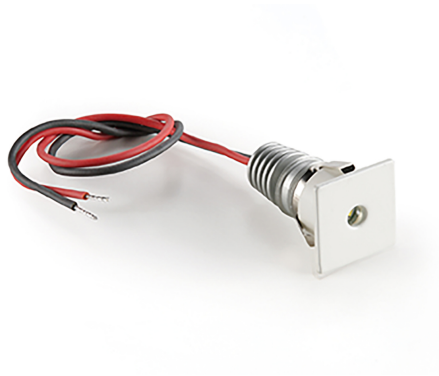
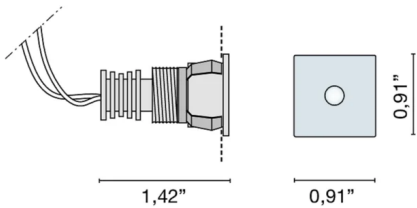


Code	6321	
Description	Recessed micro spotlight (IP40) direct light with aluminum square body.	
Year of production	2007	
Typology	recessed ceiling wall	
Material	aluminium	
Light emission	live	
IP grade	40	
Finishes	.01 White .32 Satin nickel	
Allimentation	350mA - 2,9Vdc	
Technical Data	/W 1W (151 lm source) - 4000K - CRI>90 /WW 1W (143 lm source) - 3000K - CRI>90 /XW 1W (138 lm source) - 2700K - CRI>90	
Net weight	0,04 lb	
	7,87 inch	
	0,79 inch	

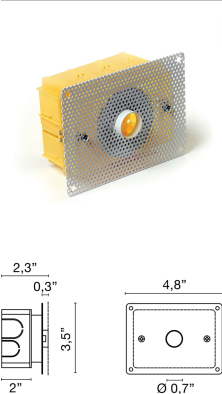

ACCESSORIES

 Technical drawing of the Plastic Plastic Box showing dimensions: length 2,7", diameter Ø 1,1", and hole diameter Ø 0,9".	Plastic Plastic Box mA 350 500	0215	0,03 lb
 Technical drawing of the Box + Perforated Plaster showing dimensions: length 2,3", width 2", height 0,3", and depth 3,5". The perforated plaster has a width of 4,8" and a central hole diameter of Ø 0,7".	Box + Perforated Plaster mA 350 500	0212	0,22 lb
 Technical drawing of the Multi-power dimmable driver PUSH showing dimensions: length 4,5", width 1,3", and height 0,8".		0128	0,14 lb
	Multi-power dimmable driver PUSH - 1...10V, 2-11 Spot mA 350 500	0141/DIM .DIM  DIM	0,00 lb

ACCESSORIES



0141/DALI 0,22 lb
.DALI  DALI



0145 0,47 lb



Multi-power DALI dimmable driver, 1-21 Spot
mA 350 500

0145/DALI 0,47 lb
.DIM  1-10V-PUSH
.1-10V  1-10V
.DALI  DALI