


Code	6323	
Description	Square recessed spotlight IP40 aluminum structure, anodized aluminum heat sink and methacrylate front lens.	
Year of production	2007	
Typology	recessed ceiling wall	
Material	aluminium	
Light emission	direct	
IP grade	40	
Finishes	.01	White
	.32	Satin nickel
Allimentation	500mA - 2,9Vdc	
Technical Data	/W 2W (209 lm source) - 4000K - CRI>90	
	/WW 2W (199 lm source) - 3000K - CRI>90	
	/XW 2W (189 lm source) - 2700K - CRI>90	
Optical grade	11°	
	25°	
	45°	
Net weight	0,13 lb	
	7,87 inch	
	1,26 inch	

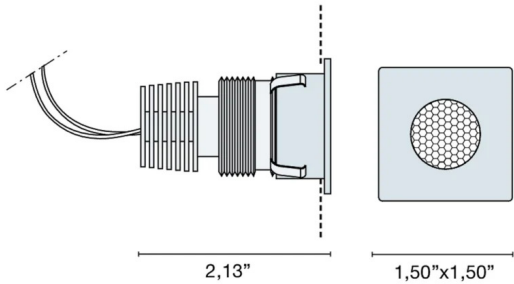


ACCESSORIES

Kit: box + perforated plaster Kit: box + perforated plaster


0213

0,22 lb

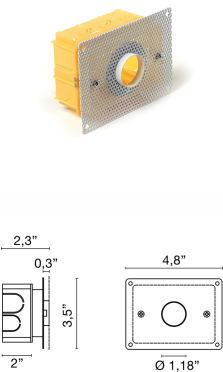


0127

0,14 lb



0128

0,14 lb



Multi-power dimmable driver PUSH - 1...10V, 2-11 Spot
mA 350 500

0141/DIM
.DIM  DIM

0,00 lb



ACCESSORIES



0141/DALI 0,22 lb
.DALI ➤ DALI



0145 0,47 lb



Multi-power DALI dimmable driver, 1-21 Spot
mA 350 500

0145/DALI 0,47 lb
.DIM ➤ 1-10V-PUSH
.1-10V ➤ 1-10V
.DALI ➤ DALI