



Code	6340
Description	Recessed spotlight (IP44) transparent methacrylate diffuser characterized by the presence of air bubbles inside. The flange is made of chrome-plated aluminum, the heat sink of anodized aluminum.
Year of production	2010
Typology	recessed ceiling wall
Material	methacrylate/aluminum
Light emission	direct
IP grade	40
Finishes	.00  Transparent
Allimentation	350mA - 2,9Vdc
Technical Data	/W 1W (151 lm source) - 4000K - CRI>90 /WW 1W (143 lm source) - 3000K - CRI>90 /XW 1W (132 lm source) - 2700K - CRI>90
Net weight	0,18 lb
	7,87 inch
	1,18 inch

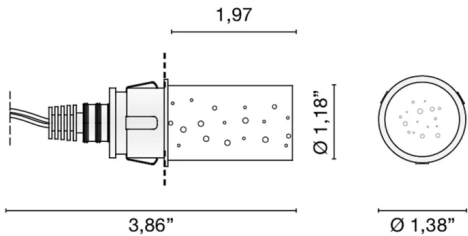


ACCESSORIES


Plastic Plastic Box 0216 0,05 lb



Kit: box + perforated plaster Kit: box + perforated plaster 0213 0,22 lb

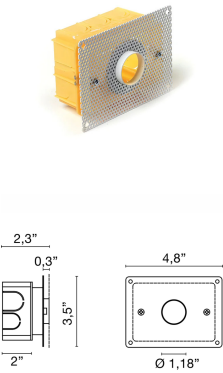

350mA Driver 1-10 Spot mA350 0128 0,14 lb



Multi-power dimmable driver PUSH - 1...10V, 2-11 Spot mA 350 500 0141/DIM .DIM DIM 0,00 lb



ACCESSORIES



0141/DALI 0,22 lb
.DALI DALI



0145 0,47 lb



Multi-power DALI dimmable driver, 1-21 Spot
mA 350 500

0145/DALI 0,47 lb
.DIM 1-10V-PUSH
.1-10V 1-10V
.DALI DALI