

Code **6358**

Description Recessed spotlight (IP44) with diffused light with hand-ground lead crystal diffuser, chrome-plated aluminum flange and anodized aluminum heat sink.

Year of production 2009

Typology recessed ceiling

Material aluminum/crystal

Light emission direct

IP grade 44

Finishes **.50**  Crystal

Allimentation 350mA - 2,9Vdc

Technical Data
/W 1W (151 lm source) - 4000K
/WW 1W (143 lm source) - 3000K
/XW 1W (138 lm source) - 2700K

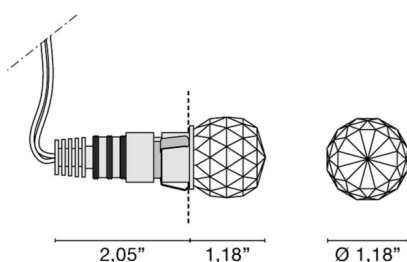
Net weight 0,13 lb






7,87 inch



0,79 inch



ACCESSORIES

 	Plastic Plastic Box mA 350 500	0215	0,03 lb
 	Box + Perforated Plaster mA 350 500	0212	0,22 lb
 	350mA Driver 1-10 Spot mA350	0128	0,14 lb
	Multi-power dimmable driver PUSH - 1...10V, 2-11 Spot mA 350 500	0141/DIM .DIM  DIM	0,00 lb

ACCESSORIES



0141/DALI 0,22 lb
.DALI ➤ DALI



0145 0,47 lb



Multi-power DALI dimmable driver, 1-21 Spot
mA 350 500

0145/DALI 0,47 lb
.DIM ➤ 1-10V-PUSH
.1-10V ➤ 1-10V
.DALI ➤ DALI