

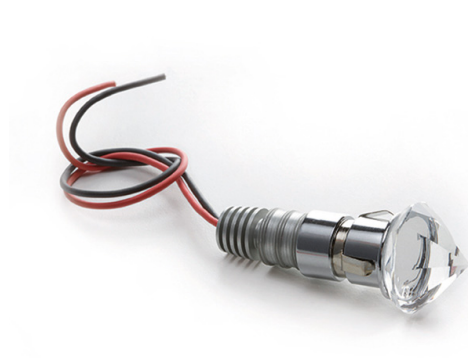
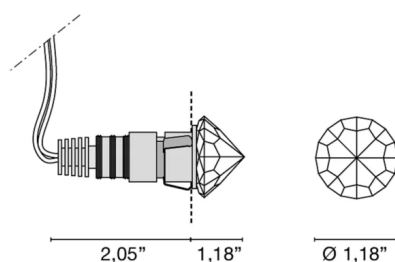


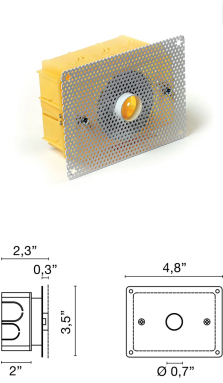

Code	6360
Description	Recessed spotlight (IP44) with diffused light with hand-ground lead crystal diffuser, chrome-plated aluminum flange and anodized aluminum heat sink.
Year of production	2009
Typology	recessed ceiling wall
Material	aluminum/crystal
Light emission	direct
IP grade	44
Finishes	.50  Crystal
Allimentation	350mA - 2,9Vdc
Technical Data	/W 1W (151 lm source) - 4000K /WW 1W (143 lm source) - 3000K /XW 1W (132 lm source) - 2700K
Net weight	0,07 lb
	7,87 inch
	0,79 inch



ACCESSORIES

 Technical drawing of the Plastic Plastic Box showing dimensions: length 2.7", diameter Ø 1.1", and hole diameter Ø 0.9".	Plastic Plastic Box mA 350 500	0215	0,03 lb
 Technical drawing of the Box + Perforated Plaster showing dimensions: height 2.3", mounting hole diameter Ø 0.3", depth 3.5", width 4.8", and mounting hole diameter Ø 0.7".	Box + Perforated Plaster mA 350 500	0212	0,22 lb
 Technical drawing of the 350mA Driver showing dimensions: length 4.5", height 0.8", and width 1.3".	350mA Driver 1-10 Spot mA350	0128	0,14 lb
 Technical drawing of the Multi-power dimmable driver showing dimensions: length 4.5", height 0.8", and width 1.3".	Multi-power dimmable driver PUSH - 1...10V, 2-11 Spot mA 350 500	0141/DIM .DIM  DIM	0,00 lb

ACCESSORIES



0141/DALI 0,22 lb
.DALI  DALI



0145 0,47 lb



Multi-power DALI dimmable driver, 1-21 Spot
mA 350 500

0145/DALI 0,47 lb
.DIM  1-10V-PUSH
.1-10V  1-10V
.DALI  DALI