




Code	6361
Description	IP67 walkable recessed radial spotlight with AISI 316L stainless steel flange, aluminum heat sink and 30 cm neoprene cable.
Year of production	2008
Typology	recessed ceiling wall
Material	INOX AISI 316L
Light emission	indirect
IP grade	67
Finishes	.33  Brushed steel
Allimentation	350mA - 2,9Vdc
Technical Data	/B 1.5W Blue LED - CRI>90 /W 2W (209 lm source) - 4000K - CRI>90 /WW 2W (199 lm source) - 3000K - CRI>90 /XW 2W (189 lm source) - 2700K - CRI>90
Net weight	0,22 lb
	11,81 inch
	1,26 inch

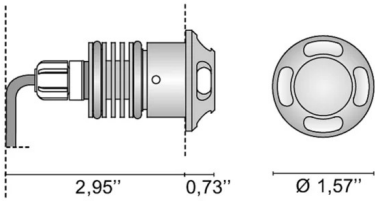


ACCESSORIES

Plastic Plastic Box

0216

0,05 lb



Kit draining junction box + IP connector Kit draining junction
box + IP connector

0220

0,23 lb



0127

0,14 lb



0128

0,14 lb

ACCESSORIES



Multi-power dimmable driver PUSH - 1...10V, 2-11 Spot
350mA 500mA

0141/DIM 0,00 lb
.DIM  DIM



0141/DALI 0,22 lb
.DALI  DALI



0145 0,47 lb



Multi-power DALI dimmable driver, 1-21 Spot
mA 350 500

0145/DALI 0,47 lb
.DIM  1-10V-PUSH
.1-10V  1-10V
.DALI  DALI