



Code **6368**

Description IP67 walkable recessed spotlight with diffused light with AISI 316L stainless steel flange, aluminum heat sink, frosted glass screen and 30cm neoprene cable.

Year of production 2010

Typology recessed ceiling wall ground recessed ceiling wall recess recessed ground

Material INOX AISI 316L

Light emission direct

IP grade 67

Finishes **.33** Brushed steel

Allimentation 350mA - 8,7V

Technical Data
/W 3W (453 lm source) - 4000K - CRI>90
/WW 3W (429 lm source) - 3000K - CRI>90
/XW 3W (405 lm source) - 2700K - CRI>90


Net weight 0,88 lb



11,81 inch



2,36 inch

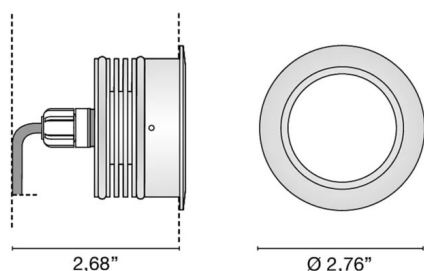


ACCESSORIES



Kit draining junction box + IP connector Kit draining junction
box + IP connector

0230

0,20 lb



0128

0,14 lb



Multi-power dimmable driver PUSH - 1...10V, 2-11 Spot
350mA 500mA

0141/DIM

0,00 lb

.DIM  DIM



0141/DALI

0,22 lb

.DALI  DALI

ACCESSORIES

		0145	0,47 lb
		0145/DALI .DIM  1-10V-PUSH .1-10V  1-10V .DALI  DALI	0,47 lb