


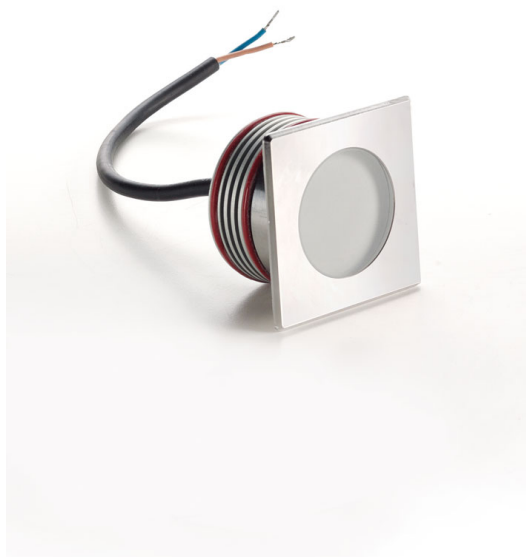

Code

6383

Description

IP67 walkable recessed spotlight with diffused light with AISI 316L stainless steel flange, aluminum heat sink, frosted glass screen and 30cm neoprene cable.

Year of production

2011

Typology

recessed ceiling wall earth

Material

INOX AISI 316L

Light emission

direct

IP grade

67

Finishes

.33



Brushed steel

Allimentation

350mA - 8,7V

Technical Data

/W 3W (453 lm source) - 4000K - CRI>90

/WW 3W (429 lm source) - 3000K - CRI>90

/XW 3W (405 lm source) - 2700K - CRI>90

Net weight


0,77 lb



11,81 inch



2,36 inch

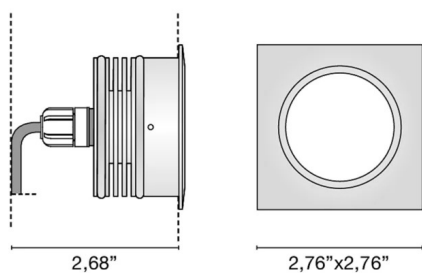

ACCESSORIES



Kit draining junction box + IP connector Kit draining junction
box + IP connector

0230

0,20 lb



Wall formwork Wall plastic Box

0232

0,13 lb



0128

0,14 lb



Multi-power dimmable driver PUSH - 1...10V, 2-11 Spot
350mA 500mA

0141/DIM
.DIM  DIM

0,00 lb

ACCESSORIES



0141/DALI 0,22 lb
.DALI  DALI



0145 0,47 lb



Multi-power DALI dimmable driver, 1-21 Spot
mA 350 500

0145/DALI 0,47 lb
.DIM  1-10V-PUSH
.1-10V  1-10V
.DALI  DALI