



Code **6384**

Description IP67 walkable recessed spotlight with AISI 316L stainless steel round flange, aluminum heat sink and 30 cm neoprene cable.

Year of production 2012

Typology recessed ceiling wall ground

Material INOX AISI 316L

Light emission direct

IP grade 67

Finishes **.33**  Brushed steel

Allimentation 500mA - 2,9Vdc

Technical Data
/W 2W (209 lm source) - 4000K - CRI>90
/WW 2W (199 lm source) - 3000K - CRI>90
/XW 2W (189 lm source) - 2700K - CRI>90

Optical grade
 11°
 25°
 45°


Net weight 0,20 lb



11,81 inch



1,26 inch

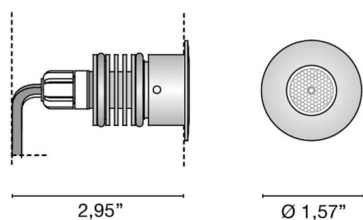


ACCESSORIES

Plastic Plastic Box

0216


0,05 lb



Kit draining junction box + IP connector Kit draining junction box + IP connector


0220

0,23 lb



0127

0,14 lb



0128

0,14 lb

ACCESSORIES



Multi-power dimmable driver PUSH - 1...10V, 2-11 Spot
350mA 500mA

0141/DIM 0,00 lb
.DIM  DIM



0141/DALI 0,22 lb
.DALI  DALI



0145 0,47 lb



Multi-power DALI dimmable driver, 1-21 Spot
mA 350 500

0145/DALI 0,47 lb
.DIM  1-10V-PUSH
.1-10V  1-10V
.DALI  DALI