

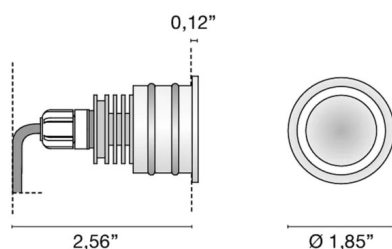


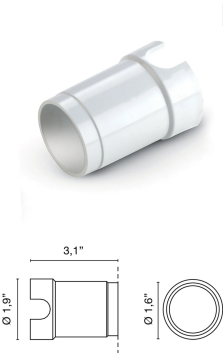

Code	6389
Description	IP67 walkable recessed spotlight with direct/diffused light with AISI 316L stainless steel flange, aluminum heat sink and 30 cm neoprene cable.
Year of production	2012
Typology	recessed ceiling wall ground
Material	INOX AISI 316L
Light emission	direct/broadcast
IP grade	67
Finishes	.33 Brushed steel
Allimentation	350mA - 2,9Vdc
Technical Data	/B 1W Blue LED - CRI>90 /W 2W (209 lm source) - 4000K - CRI>90 /WW 2W (199 lm source) - 3000K - CRI>90 /XW 2W (189 lm source) - 2700K - CRI>90
Net weight	0,44 lb
	11,81 inch
	1,50 inch



ACCESSORIES

 Technical drawing of the plastic counter box showing dimensions: 3.1" length, 1.9" height, and 1.6" diameter.	Plastic counter box Plastic box mA 350 500	0217	0,06 lb
 Technical drawing of the drainage formwork kit showing dimensions: 1.4" diameter, 3.9" height, and 4.3" base diameter.	Drainage formwork kit + IP connector	0250	0,21 lb
 Technical drawing of accessory 0127 showing dimensions: 0.8" height, 4.5" length, and 1.3" width.		0127	0,14 lb
 Technical drawing of accessory 0128 showing dimensions: 0.8" height, 4.5" length, and 1.3" width.		0128	0,14 lb

ACCESSORIES



Multi-power dimmable driver PUSH - 1...10V, 2-11 Spot
350mA 500mA

0141/DIM 0,00 lb
.DIM  DIM



0141/DALI 0,22 lb
.DALI  DALI



0145 0,47 lb



Multi-power DALI dimmable driver, 1-21 Spot
mA 350 500

0145/DALI 0,47 lb
.DIM  1-10V-PUSH
.1-10V  1-10V
.DALI  DALI