



Code

6391

Description

Recessed (IP44) direct/diffuse spotlight with anodized aluminum body and satin methacrylate diffuser.

Year of production

2012

Typology

recessed ceiling wall

Material

aluminium

Light emission

direct/broadcast

IP grade

44

Finishes

.01

White

Allimentation

350mA - 2,9Vdc

Technical Data

/B 1W Blue LED - CRI>90

/W 2W (209 lm source) - 4000K - CRI>90

/WW 2W (199 lm source) - 3000K - CRI>90

/XW 2W (189 lm source) - 2700K - CRI>90

Net weight

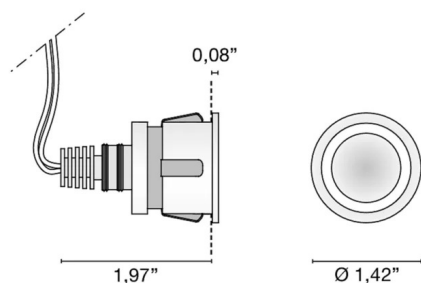
0,09 lb




7,87 inch





1,18 inch



ACCESSORIES

	Plastic Plastic Box	0216	0,05 lb
			
			

	Kit: box + perforated plaster Kit: box + perforated plaster	0213	0,22 lb
			
			

		0127	0,14 lb
			
			

	350mA Driver 1-10 Spot mA350	0128	0,14 lb
			
			

ACCESSORIES



Multi-power dimmable driver PUSH - 1...10V, 2-11 Spot
mA 350 500

0141/DIM 0,00 lb
.DIM  DIM



0141/DALI 0,22 lb
.DALI  DALI



0145 0,47 lb



Multi-power DALI dimmable driver, 1-21 Spot
mA 350 500

0145/DALI 0,47 lb
.DIM  1-10V-PUSH
.1-10V  1-10V
.DALI  DALI