



Code

6394

Description

IP67 walkable recessed spotlight with AISI 316L stainless steel square flange, aluminum heat sink and 30 cm neoprene cable.

Year of production

2012

Typology

recessed ceiling wall ground

Material

INOX AISI 316L

Light emission

direct

IP grade

67

Finishes

.33



Brushed steel

Allimentation

500mA - 2,9Vdc

Technical Data

/W 2W (209 lm source) - 4000K - CRI>90

/WW 2W (199 lm source) - 3000K - CRI>90

/XW 2W (189 lm source) - 2700K - CRI>90

Optical grade

11°

25°

45°

Net weight


0,22 lb



11,81 inch



1,26 inch

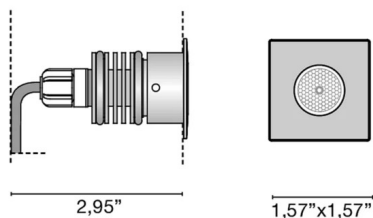


ACCESSORIES

Plastic Plastic Box

0216


0,05 lb



Kit draining junction box + IP connector Kit draining junction box + IP connector


0220

0,23 lb



0127

0,14 lb



0128

0,14 lb

ACCESSORIES



Multi-power dimmable driver PUSH - 1...10V, 2-11 Spot
350mA 500mA

0141/DIM 0,00 lb
.DIM  DIM



0141/DALI 0,22 lb
.DALI  DALI



0145 0,47 lb



Multi-power DALI dimmable driver, 1-21 Spot
mA 350 500

0145/DALI 0,47 lb
.DIM  1-10V-PUSH
.1-10V  1-10V
.DALI  DALI