



Code	6418
Description	IP67 walkable modular system for outdoor lighting with transparent coextruded methacrylate body and opal diffusing part, formwork and end caps made of anodized aluminum die with reinforced outdoor anodizing treatment.
Year of production	2013
Typology	wall recess recessed ground
Material	methacrylate
Light emission	direct
IP grade	67
Finishes	.01  White
Allimentation	24Vdc
Technical Data	/WW 9.6W (1020 lm source) - 3000K - CRI>90 IP67 connector included 9.6W 1020lm CRI>90IP67 connector included
Net weight	3,53 lb
	19,69 inch



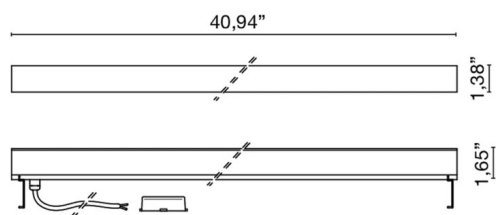

EXAMPLE OF CONFIGURATION

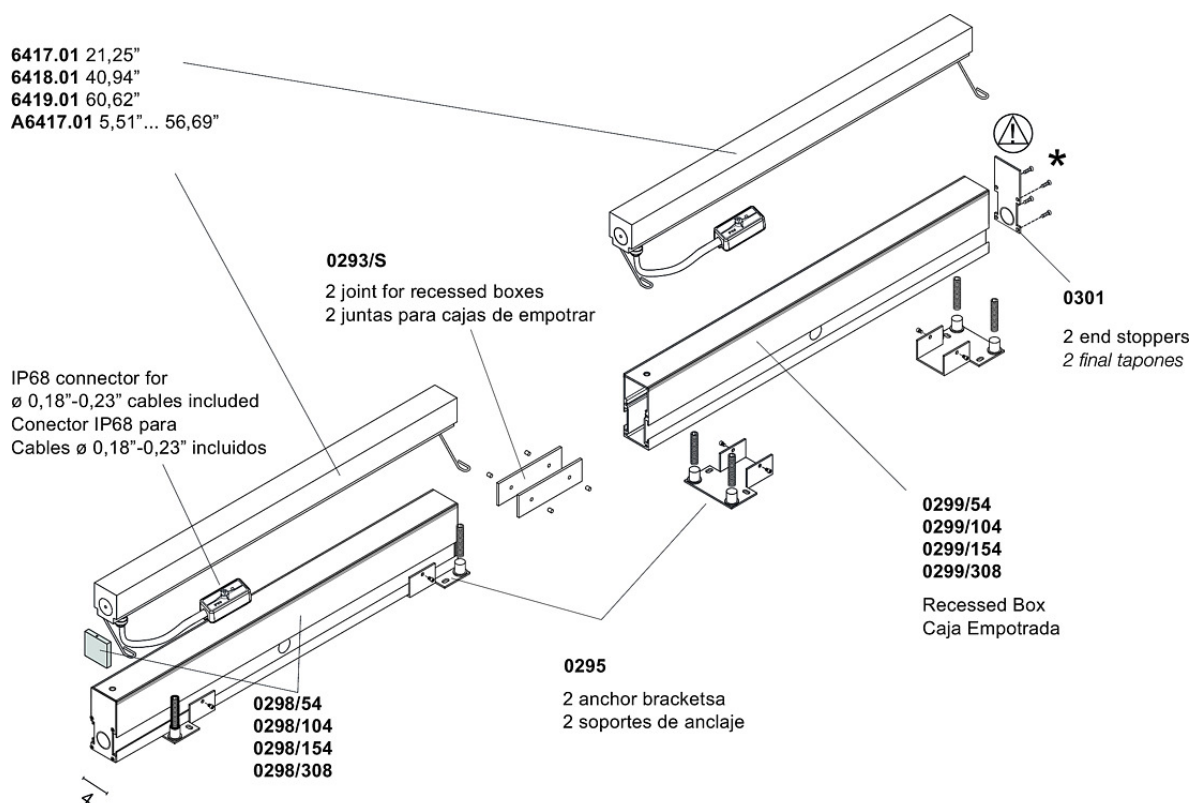

Starting recessed box with element for lamp maintenance.
Caja de empotrar de arranque con elemento para el mantenimiento de la lámpara.

* The end stopper is included in the starting box. *El tope final está incluido en la caja de inicio.*

SYSTEM ELEMENTS



0298 0,00 lb



0299 0,00 lb



0295 0,00 lb



0293/S 0,00 lb



0301 0,00 lb

ACCESSORIES



24V

U0160/24 0,00 lb

ACCESSORIES

U0161/24 0,00 lb



Custom size

Table lengths available upon request. Measurements refer to complete fixtures including end caps.

inches	watt	3000K (WW)	lm	4000K (W)	lm
5,51"	1 W	A6417.01/14/WW	102	A6417.01/14/W	108
9,45"	1.9 W	A6417.01/24/WW	204	A6417.01/24/W	216
13,39"	2.9 W	A6417.01/34/WW	306	A6417.01/34/W	324
17,32"	3.8 W	A6417.01/44/WW	408	A6417.01/44/W	432
21,26"	4.8 W	6417.01/WW	510	6417.01/W	540
25,20"	5.8 W	A6417.01/64/WW	612	A6417.01/64/W	648
29,13"	6.7 W	A6417.01/74/WW	714	A6417.01/74/W	756
33,07"	7.7 W	A6417.01/84/WW	816	A6417.01/84/W	864
37,01"	8.6 W	A6417.01/94/WW	918	A6417.01/94/W	972
40,94"	9.6 W	6418.01/WW	1020	6418.01/W	1080
44,88"	10.6 W	A6417.01/114/WW	1122	A6417.01/114/W	1188
48,82"	11.5 W	A6417.01/124/WW	1224	A6417.01/124/W	1296
52,76"	12.5 W	A6417.01/134/WW	1326	A6417.01/134/W	1404
56,69"	13.4 W	A6417.01/144/WW	1428	A6417.01/144/W	1512
60,63"	14.4 W	6419.01/WW	1530	6419.01/W	1620