





Code	6616
Description	LINEA is offered in different modular lengths from 12 cm up to 302 cm, in three shades of light, 2700K, 3000K, 4000K with CRI>90
Year of production	2013
Typology	recessed ceiling wall
Material	methacrylate/aluminum
Light emission	direct
IP grade	40
Finishes	.01  White
Allimentation	24Vdc
Technical Data	/W 22.5W (2760 lm source) - 4000K - CRI>90 /WW 22.5W (2475 lm source) - 3000K - CRI>90 /XW 22.5W (2340 lm source) - 2700K - CRI>90
Net weight	3,31 lb
	11,81 inch
	inch

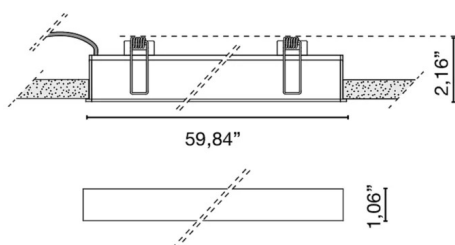

ACCESSORIES



24V

U0160/24

0,00 lb



U0161/24

0,00 lb

Custom size

Table lengths available upon request. Measurements refer to complete fixtures including end caps.

inches	watt	2700K (XW)	lm	3000K (WW)	lm	4000K (W)	lm
40,16"	15 W	6615.01/XW	1560	6615.01/WW	1650	6615.01/W	1840
4,72"	1.5 W	A6615.01/10/XW	156	A6615.01/10/WW	165	A6615.01/10/W	184
8,66"	3 W	A6615.01/20/XW	312	A6615.01/20/WW	330	A6615.01/20/W	368
12,60"	4.5 W	A6615.01/30/XW	468	A6615.01/30/WW	495	A6615.01/30/W	552
16,54"	6 W	A6615.01/40/XW	624	A6615.01/40/WW	660	A6615.01/40/W	736
20,47"	7.5 W	A6615.01/50/XW	780	A6615.01/50/WW	825	A6615.01/50/W	920
24,41"	9 W	A6615.01/60/XW	936	A6615.01/60/WW	990	A6615.01/60/W	1104
28,35"	10.5 W	A6615.01/70/XW	1092	A6615.01/70/WW	1155	A6615.01/70/W	1288
32,28"	12 W	A6615.01/80/XW	1248	A6615.01/80/WW	1320	A6615.01/80/W	1472
36,22"	13.5 W	A6615.01/90/XW	1404	A6615.01/90/WW	1485	A6615.01/90/W	1656
44,09"	16.5 W	A6615.01/110/XW	1716	A6615.01/110/WW	1815	A6615.01/110/W	2024
48,03"	18 W	A6615.01/120/XW	1872	A6615.01/120/WW	1980	A6615.01/120/W	2208
51,97"	19.5 W	A6615.01/130/XW	2028	A6615.01/130/WW	2145	A6615.01/130/W	2392
55,91"	21 W	A6615.01/140/XW	2184	A6615.01/140/WW	2310	A6615.01/140/W	2576
59,84"	22.5 W	6616.01/XW	2340	6616.01/WW	2475	6616.01/W	2760
63,78"	24 W	A6615.01/160/XW	2496	A6615.01/160/WW	2640	A6615.01/160/W	2944
67,72"	25.5 W	A6615.01/170/XW	2652	A6615.01/170/WW	2805	A6615.01/170/W	3128
71,65"	27 W	A6615.01/180/XW	2808	A6615.01/180/WW	2970	A6615.01/180/W	3312
75,59"	28.5 W	A6615.01/190/XW	2964	A6615.01/190/WW	3135	A6615.01/190/W	3496
79,53"	30 W	A6615.01/200/XW	3120	A6615.01/200/WW	3300	A6615.01/200/W	3680
83,46"	31.5 W	A6615.01/210/XW	3276	A6615.01/210/WW	3465	A6615.01/210/W	3864
87,40"	33 W	A6615.01/220/XW	3432	A6615.01/220/WW	3630	A6615.01/220/W	4048
91,34"	34.5 W	A6615.01/230/XW	3588	A6615.01/230/WW	3795	A6615.01/230/W	4232

inches	watt	2700K (XW)	lm	3000K (WW)	lm	4000K (W)	lm
95,28"	36 W	A6615.01/240/XW	3744	A6615.01/240/WW	3960	A6615.01/240/W	4416
99,21"	37.5 W	A6615.01/250/XW	3900	A6615.01/250/WW	4125	A6615.01/250/W	4600